


# A530 Ultrasonic Air-in-Line / Bubble Detector

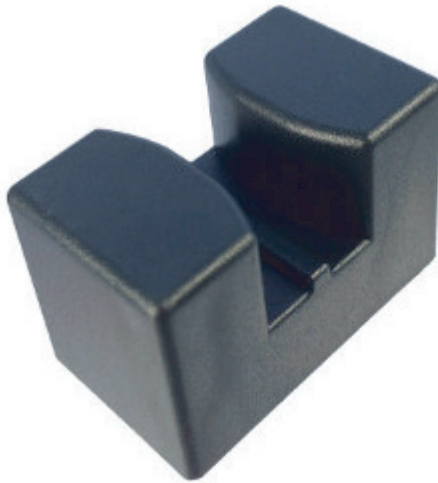



The A530 Air-In-line/Bubble Detector is one of our standard sensors for use with most 5/16 inch outside diameter tubing. It uses our proprietary digital non-invasive ultrasonic bubble sensing technology to accurately and reliably detect bubbles in a wide variety of fluids and tubing materials.

Custom characteristics can be provided for OEM users.

## FEATURES

- Optional integrated self-test function
- Low power consumption (<10 mA @5V)
- Dry-couples with a variety of tubing materials
- Custom pinouts, cables, and connectors available
- Digital “smart” circuit for superior customizability
- Non-invasive ultrasonic bubble sensing technology
- Optional Red/Green LED for visual output indication

## DIMENSIONAL DRAWING

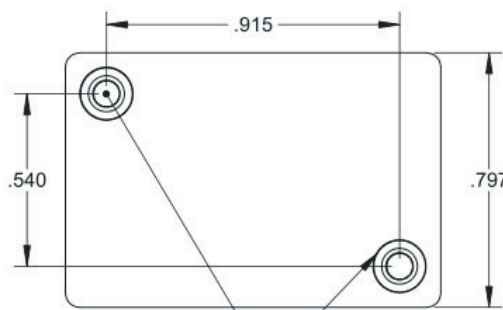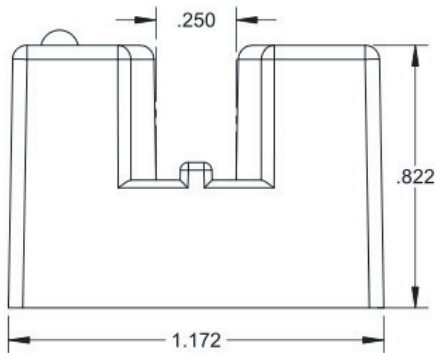

#4-40 OR M2.5 THREADED INSERTS  
FOR MOUNTING

DIMENSIONS IN INCHES

## SPECIFICATIONS

Tube Size	5/16" OD Nominal
Bubble Size	Customer Selectable
Sensor Input	5-12 VDC (<10 mA)
Sensor Output	5 V Water / 0 V Air
Response Time	50 microseconds Typical
Lead Out	Red 5-12 VDC
	Black Ground
	Green Output
	White Test (Optional)

Part Name	Description
A530-SL	A530 Bubble sensor with standard (#4-40) threaded inserts and red/green LED
A530-ML	A530 bubble sensor with metric (M2.5) threaded inserts and red/green LED
A530-SN	A530 Bubble sensor with standard (#4-40) threaded inserts without LED
A530-MN	A530 bubble sensor with metric (M2.5) threaded inserts without LED