

4

3

DWG NO. 005-06962


SH 1

REV B

1

PROPRIETARY  
 EXCEPT AS OTHERWISE AGREED IN WRITING, THE INFORMATION AND DESIGN DISCLOSED HEREIN ARE THE PROPERTY OF SENSARAS AND MUST NOT BE COPIED OR DISTRIBUTED OUTSIDE SENSARAS EXCEPT TO AUTHORIZED PERSONS WITH A GENUINE NEED-TO-KNOW WHO BY THE USE HEREOF ACKNOWLEDGE SENSARAS OWNERSHIP AND AGREE TO MAINTAIN THIS INFORMATION AND DESIGN IN STRICT CONFIDENCE.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	08/08/13	GDM
B	LOCATION OF CABLE & LED	11/13/13	GDM

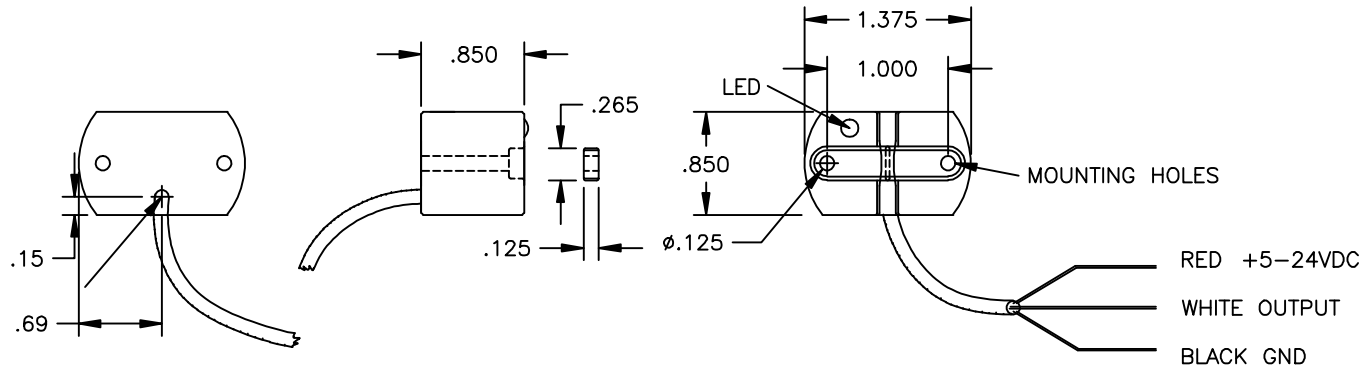


CABLE EXIT

WIRING

INPUT: RED = 5VDC-24VDC  
 BLACK = GND  
 OUTPUT: WHITE = OUTPUT  
 OPEN COLLECTOR NPN  
 OPEN WHEN AIR PRESENT  
 LOW WHEN LIQUID PRESENT  
 LED ON (AIR PRESENT)

MATERIAL: EPOXY  
 ELECTRONICS: INTEGRAL  
 CABLE: 4'

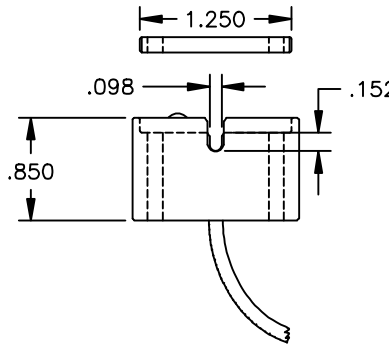

D

C

B

A

D

C

B

A

4

3

2

1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: 2 PLACE DECIMAL ±.01 3 PLACE DECIMAL ±.005 ANGULAR ±1°		CONTR NO	005- ABD	
BY OR APPROVED		DATE		
DWN	<i>J. B. Y. L.</i>	08/08/13		
CHK				
DESIGN	GDM	08/08/13		
ENGRG				
ENGRG				
PROJ	GDM	08/08/13		
QA				
MFG				

NEXT ASSY		USED ON	FINISH	EPOXY
APPLICATION				
DO NOT SCALE DRAWING				

		<b>Sensaras</b> 0.125" ABD 5-24V-NPN-2-LED-COVER	
SIZE	CAGE CODE	DWG NO	REV
B	6XTK9	005-06962	B
SCALE		SHEET 1 OF 1	
1:1			